






# Pyralis

## With door open +5cm depth

Code	Model	Dimensions LxWxH cm			
<b>P08PY12069</b>	PY D4	↔ 113	↗ 103	↕ 40	
	Control	Chamber height cm	Cooking surface cm		
	Digital	15	70x70		
	Pizza Capacity	Max Temperature	Weight Kg		
	4 x Ø 30/34	 450 °C	 115		
	Total Power KW	Voltage V	Phases Ph	Frequency Hz	
	6,60	400	3N+T	50/60	




## General Features

Designed to meet and exceed the expectations of even the most demanding professionals, <b>providing high performance, quality, and service.</b>	<b>Excellent Performance:</b> Robust, suitable for intensive use and various types of dough, ensuring even baking.	Style, quality, and the guarantee of Made in Italy are also reflected in the aesthetics of the product, making it the perfect solution for "front of house" installations.	The line includes a <b>complete range of models with capacities from 4 to 18 pizzas</b> , considering a Ø of 33 cm.
It is equipped with high-performance Activestone technology and can be ordered with a complete refractory chamber for even greater thermal efficiency.	Ultra-fast heating with a 50% reduction in heating time and energy consumption up to 25%, compared to a traditional heating system.	Mechanical or digital control panel: the digital model offers extreme precision in temperature setting, can store up to 2 programs, and has a programmed ignition and shutdown function.	Maximum temperature of 450 °: perfect for any type of dough, even for highly hydrated products that require a very short cooking time, such as Neapolitan pizza.
All models boast a robust stainless steel structure, easy-to-open doors, and an ergonomic handle.	Dual internal 12V lighting and double glass for greater heat preservation.	Stainless Steel Aspirating Hood, Ø outlet 200mm.	Controlled opening and closing chimney valve.



## Options

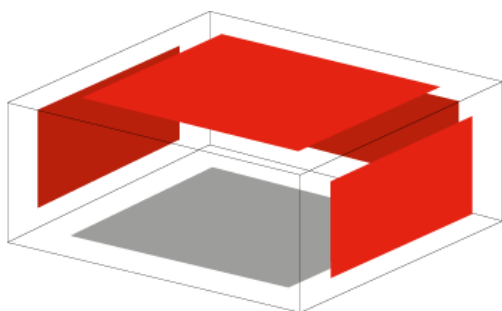

### **PYRALIS REFRACTORY CHAMBER**

INTERNAL CHAMBER COVERED WITH REFRACTORY STONE

Cooking surface dimensions (L x W x H cm)

Refractory net weight kg

Code



**67x68,5x15**

**15**

**S08TL64013**



# Pyralis

Code  
**P08PY12069**


Model  
**PY D4**

## Accessories



### SUPPORT PYRALIS

SUPPORT IN STAINLESS STEEL WITH SUPPORT SURFACE

	Code	Model	Size with feet cm	Size with wheels cm	Internal dimensions	Peso
	<b>P11FN64001</b>	S4	112x85x108/111	112x85x109	89 x 62 x 76	34


### Option

#### wheels

Set of 4 rotating wheels 2 with brake + 2 without brake

Code

**S66RU65003**



## Accessories



### PYRALIS ASPIRATING HOOD

STAINLESS STEEL HOOD SMOKE OUTLET DIAMETER 200mm



Code	Model	Voltage V	Phases Ph	Frequency Hz	Light	Dimensions cm	Peso
<b>P13PY10017</b>	K4 - 8	230	1N + T	50	S	111x116,3x29,5	40

### Option

#### EXTRACTOR HOOD MOTOR

ELECTRIC SUCTION MOTOR (POWER CONSUMPTION 110 W) With control unit for speed adjustment - power 980 m3/h



Code	Power Supply V	Phases Ph	Frequency Hz	Net weight Kg
<b>S66MT64002</b>	230	1N + T	50	3




# Pyralis

Code


**P08PY12069**

Model


**PY D4**

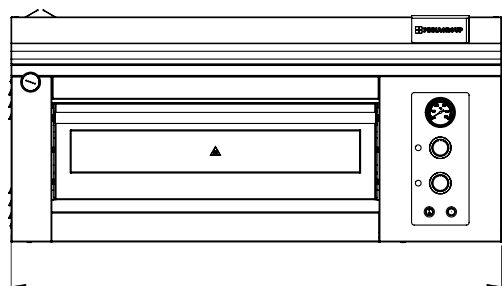

**L**

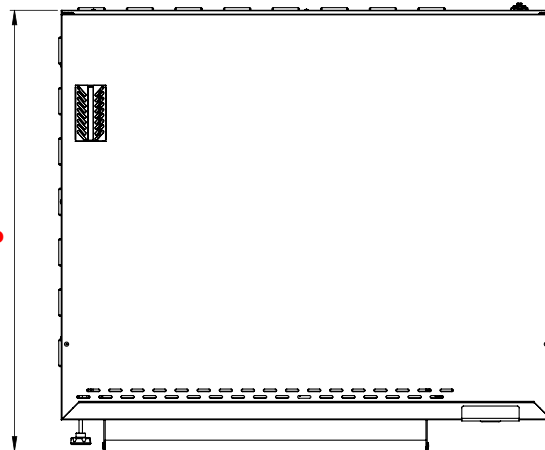

**P**

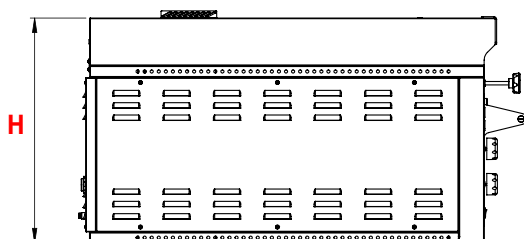

**H**

Con porta aperta +5cm profondità  
With door open +5cm depth  
Avec la porte ouverte +5cm de profondeur

MOD	COD	DIMENSIONS (cm) L x P x H
PY M4	P08PY10032	<b>113x101x51</b>
PY D4	P08PY12029	<b>113x101x51</b>
PY M6	P08PY10033	<b>113x136x51</b>
PY D6	P08PY12030	<b>113x136x51</b>
PY M6L	P08PY10034	<b>148x101x51</b>
PY D6L	P08PY12031	<b>148x101x51</b>
PY M9	P08PY10035	<b>148x136x51</b>
PY D9	P08PY12032	<b>148x136x51</b>
PY M8	P08PY10036	<b>113x101x83</b>
PY D8	P08PY12033	<b>113x101x83</b>
PY M12	P08PY10037	<b>113x136x83</b>
PY D12	P08PY12034	<b>113x136x83</b>
PY M12L	P08PY10038	<b>148x101x83</b>
PY D12L	P08PY12035	<b>148x101x83</b>
PY M18	P08PY10039	<b>148x136x83</b>
PY D18	P08PY12036	<b>148x136x83</b>

